


NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL ELEVATIONS ARE REFERENCE FROM TOP OF FINISHED FLOOR ELEVATION +0'-0".
2. MECHANICAL CONTRACTOR TO DETERMINE THE LOCATION OF REQUIRED DUCT, STACKS AND PIPE SUPPORTS AS REQUIRED.
3. ALL DIMENSIONS, ELEVATIONS AND PIPE ROUTING ARE APPROXIMATE AND ARE PENDING FINAL CUSTOMER APPROVED LAYOUT.
4. MECHANICAL CONTRACTOR TO LOCATE EXACT PIPE ROUTING (UTILITIES) TO AVOID ANY INTERFERENCES W/ BLDG, STEEL, EQ. OR FIRE SYSTEMS.

5. ELECTRICAL CONTRACTOR SHALL REFERENCE SYSTEM ELECTRICAL SCHEMATICS FOR VOLTAGE, CONTROL AND SIGNAL WIRING INTERCONNECTION BETWEEN CONTROL BOXES. REFERENCE UTILITY REQUIREMENT FOR ELECTRICAL, GAS, AIR AND WATER.
6. ALL ELECTRICAL VOLTAGE, CONTROL, SIGNAL CONDUIT AND WIRING INTERFACE BETWEEN COMPONENTS IS THE RESPONSIBILITY OF CUSTOMER U.O.N
7. FLUE STACKS SHALL BE IN ACCORDANCE W/ LOCAL CODES OR GOVERNING BODIES AND ARE THE RESPONSIBILITY OF THE CUSTOMER.
8. STACK FLASHING AND SUPPORTS TO BE SUPPLIED AND INSTALLED BY CUSTOMER.

PRELIMINARY
NOT FOR CONSTRUCTION

REVISION	CHANGE	DATE

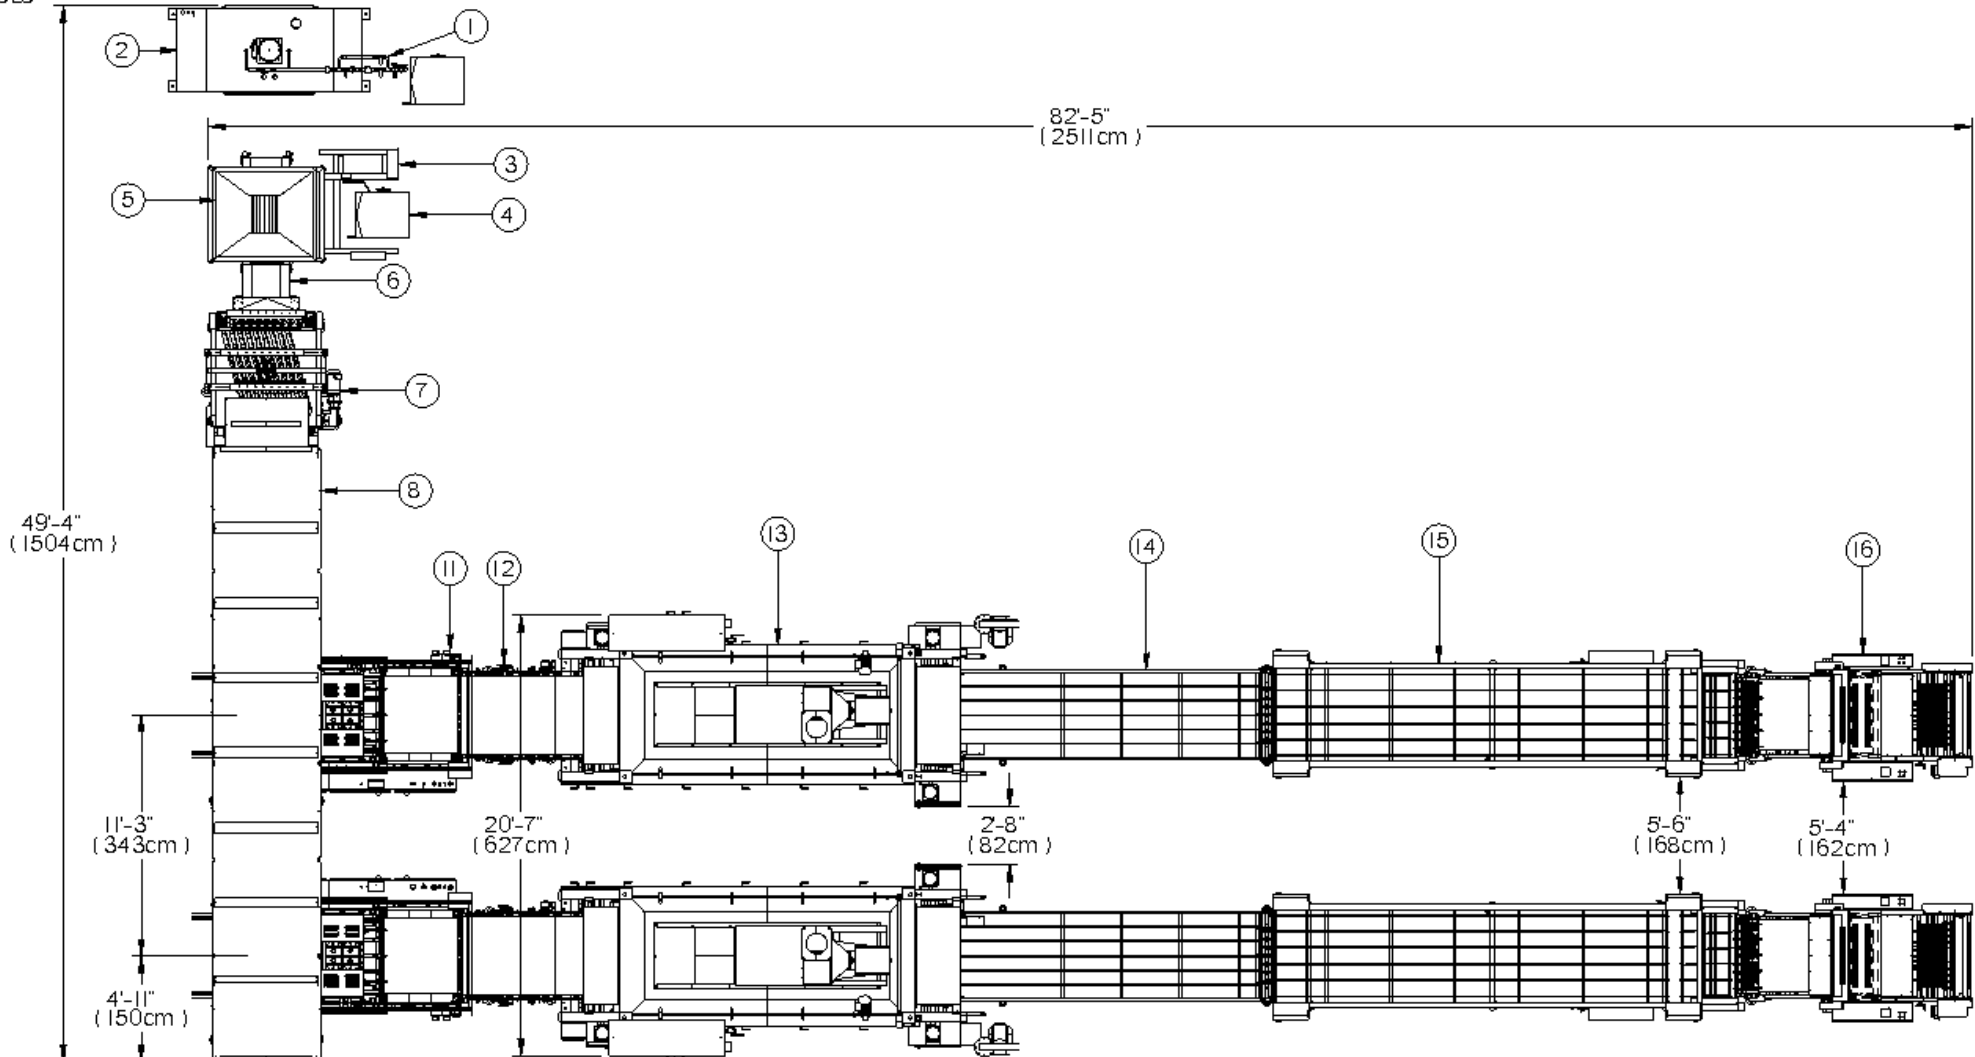

NOTE: ITEMS 9, 10 NOT SHOWN FOR CLARITY

ITEM	QTY.	DESCRIPTION	MR cfm/psi	MOTOR QTY	MOTOR HP	MPS @480V	WV CONT.
1	1	MARK II WATER METER SYSTEM	-	-	-	-	-
2	1	PEERLESS TILT BOX FLOUR MIXER HS10HD	-	2	20-5	75.2	YN
3	1	DOUGH HOPPER LIFT SYSTEM 400LB CAPACITY	-	1	2	3.4	N
4	2	DOUGH CART	-	-	-	-	-
5	1	METERING DOUGH CHUNKER	-	-	1/2	-	-
6	1	HERRERA DIVIDER	-	2	7.5 - 1/8	11.33	N/N
7	1	AYASH ROUNDER	-	1	2	3.4	N
8	2	HERRERA 9 POCKET INTERMEDIATE PROOFER	-	-	-	-	-
9	2	PAL PRESS AUTOMATIC LOADING SYSTEMS W/ PROGRAM 9 BALL	-	-	-	-	-
10	2	PORTABLE LOADER HOLDING RACKS W/ ONE PROGRAM	-	2	1/2 - 1	8.4	YY
11	2	HERRERA 42X42 TORTILLA PRESS	-	2	5 - 1/2	12.7	YY

12	2	DUAL BELT PRESS DISCHARGE, MAXIMIZER 44 MESH BELT	8 / 100	2	5 - 3	14.5	YY
13	2	ODYSSEY OVEN, FLOUR TORTILLA F0224/212/187/46	-	4	1 - 3H - 3H - 3H	9	YN/N/N
14	2	INDEPENDENT DISCHARGE CONVEYOR 48"	1 / 30	2	1 - 1	8.4	YY
15	2	COOLING CONVEYOR FLAT BED 11T 48" CLEAT TRACK BELT	-	6	2 - 1 - 5 - 1/2 - 1/2 - 1	28	W/W/W/W
16	2	ARRTECH GENESIS SERVO FLOUR TORTILLA COUNTER STACKER, 2,3,4,5, RDW	-	2	1 - 1	4.2	N/N

UTILITY LEGEND	Casa Herrera, Inc.	TITLE
<ul style="list-style-type: none"> ⊕ WATER ⊖ AIR ⊕ ELECTRICAL ⊖ FLUE STACK ⊖ CHILLED WATER ⊖ STEAM 	2666 NORTH PINE ST, POMONA, CALIFORNIA 91767 Tel: 909-866-1111 Fax: 909-866-1112 Email: info@cherrera.com	AUTOMATIC DBL DROP 42X42 SYSTEM GENERAL ARRANGEMENT Date: 09/24/08 Status: PROPOSAL Project: L-PO17422 Sheet: 1 of 1